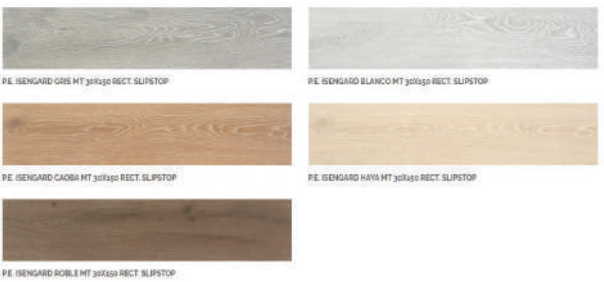


## FICHA TÉCNICA DISEÑO MADERA

MODELO / MODEL	slipstop ISENGARD MT SERIES			
FOTO / PICTURE (ORIENTATIVE)	 <p>P.E. ISENGARD GRIS MT 30x450 RECT. SLIPSTOP</p> <p>P.E. ISENGARD BLANCO MT 30x450 RECT. SLIPSTOP</p> <p>P.E. ISENGARD CACHA MT 30x450 RECT. SLIPSTOP</p> <p>P.E. ISENGARD HAYA MT 30x450 RECT. SLIPSTOP</p> <p>P.E. ISENGARD ROBLE MT 30x450 RECT. SLIPSTOP</p>			
FORMATO / SIZE	30 X 150 X 1 CM. RECTIFICADO			
GRUPO / GROUP	Bla			
TIPO / TYPE	PORCELANICO ESMALTADO / Glazed Porcelain			
ISENGARD: 14 CARAS				
DESCRIPCION DEL TEST / TEST DESCRIPTION	VALOR DEL TEST / TEST VALUE	<b>SELEKTIA</b> Porcelanato	NORMA / STANDARD	
ABSORCIÓN DE AGUA / WATER ABSORPTION	AA < 0,5%	Cumple / Passed	UNE-EN-ISO 10545-3	
FUERZA DE ROTURA / BREAKING STRENGTH	> 1300 N	Cumple / Passed	UNE-EN-ISO 10545-4	
RESISTENCIA A LA FLEXIÓN / RESISTANCE OF FLEXION	> 35 N/mm2	Cumple / Passed	UNE-EN-ISO 10545-4	
ABRASION SUPERFICIAL / SURFACE ABRASION	Clase / Class	PEI IV (ROBLE PEI III)	UNE-EN-ISO 10545-7	
RESISTENCIA AL CUARTEO / CRACKING RESISTANCE	Requerido / Requested	Cumple / Passed	UNE-EN-ISO 10545-11	
RESISTENCIA A LA HELADA / FROST RESISTANCE	Requerido / Requested	Cumple / Passed	UNE-EN-ISO 10545-12	
RESISTENCIA QUIMICA / CHEMICAL RESISTANCE	(PRODUCTOS DOMESTICOS Y DE PISCINA / Domestic & Swimming Pool Products)	Mínimo / Minimum GB	Cumple / Passed	UNE-EN-ISO 10545-13
RESISTENCIA A LOS ACIDOS / ACID RESISTANCE	GHA	Cumple / Passed	UNE-EN-ISO 10545-13	
RESISTENCIA A LAS BASES / ALKALINE RESISTANCE	GHA	Cumple / Passed	UNE-EN-ISO 10545-13	
RESISTENCIA A LAS MANCHAS / RESISTANCE TO STAINS	Mínimo / Minimum Class 3	Cumple / Passed	UNE-EN-ISO 10545-14	
RESISTENCIA AL DESLIZAMIENTO / SLIP RESISTANCE	Metodo Disponible / Available Method	Class 3	UNE-41901	
RESISTENCIA AL RAYADO / HARDNESS (MOHS)	Mínimo / Minimum 3	Cumple / Passed	EN 101	